




KLX RAPID DISSOLVABLE FRAC PLUG

The KLX Dissolvable Frac Plug provides a practical zonal isolation solution for extended reach horizontal wellbores, refracs and other zonal isolation applications where challenging mill-out situations are present.

The KLX Rapid Alloy Dissolvable Frac Plug was developed to provide operators a reliable dissolvable frac plug option when fresh water is sourced for fracturing operations. Many of these fresh waters have very low conductivity, making standard dissolvable magnesium alloys unsuitable for the application. The rapid alloy frac plug is comprised of a proprietary magnesium alloy blend that responds very well in fresh water environments. The dissolution rate accelerates when exposed to fluids with higher salinity and/or hotter bottom hole temperatures.

Cleanout costs are dramatically reduced, when compared to a traditional composite frac plug mill out operation, as the need to pump excess fluids while circulating mill-up returns to surface is no longer a necessity.

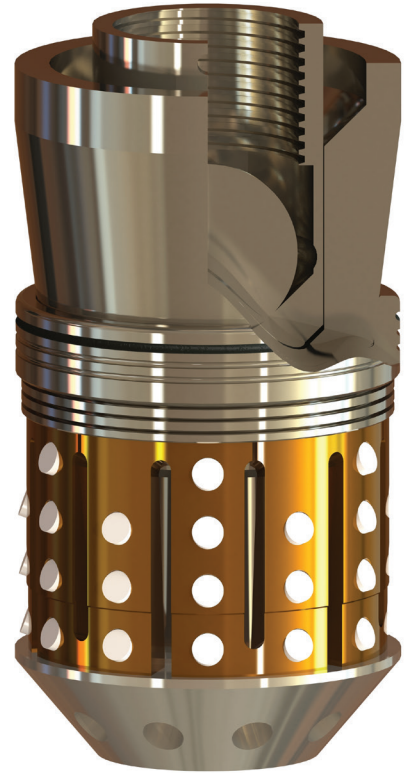

FEATURES & BENEFITS

- Predictable Dissolution Times Based on Salinity and Temperature Variables
- No Mill out Required to Remove Plug, Saving Rig Time and Cost
- Sets With Industry Standard Pressure Setting Tools
- Large Bore Size—Resulting in Higher Flow Back and Faster Dissolution
- 10,000psi Differentially Rated & Tested
- Temperature Range: 80°F to 275°F
- Additional Sizes Available in 3.5", 4" and 4.5" Patch Plug if Needed

PRODUCT SPECIFICATIONS

TOOL SIZE (IN)	CSG WEIGHT RANGE (#)	MIN CSG ID (IN)	MAX CSG ID (IN)	PLUG ID (IN)	BALL OD (IN)	PLUG OD (IN)	LENGTH (IN)	KLX PN
3.500"	9.2#	2.918"	3.046"	1.050"	1.875"	2.690"	8.40"	DSV-35-RD
4.500"	11.6#	3.939"	4.069"	1.170"	2.750"	3.670"	9.58"	DSV-45-RD
	13.5#	3.853"	3.992"			3.600"		DSV-44-RD
15.1#	3.750"	3.903"	4.026"			10.04"	DSV-50-RD	
18#	4.195"	4.361"	3.875"			10.23"	DSV-52-RD	
5.000"	21.4#	4.030"	4.218"	1.790"		4.570"	9.53"	DSV-55-RD
	17#	4.818"	4.975"			4.375"	9.57"	DSV-56-RD
20#	4.694"	4.867"	4.300"			9.59"	DSV-57-RD	
5.500"	23#	4.577"	4.764"					



3040 Post Oak Blvd., 15th Floor
 Houston, TX 77056
 Tel 832.844.1015
klxenergy.com

NEXT LEVEL READINESS >